




go:rewatt
energy of the future



PRODUCT | KEY FEATURES

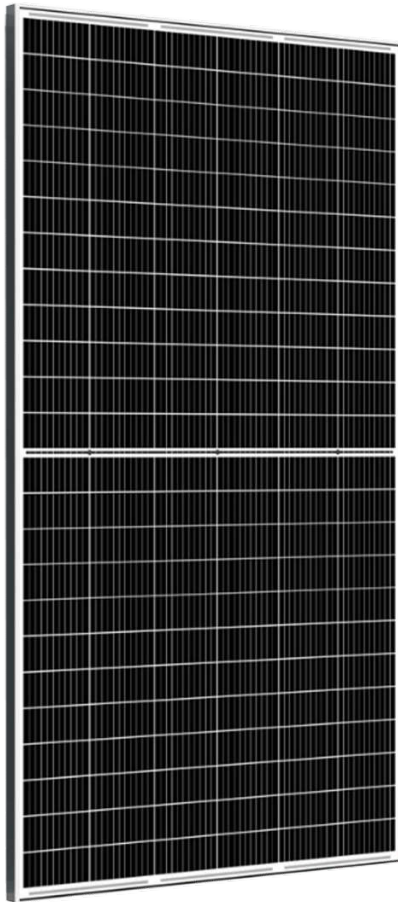

Anti-Reflective (AR) Coated Glass for Enhanced Power



Excellent Module Efficiency with Bifacial Power Gain



Positive Power Tolerance with Current Binning to Prevent Mismatch Losses



Pre and Post EL Checking With High Resolution Camera



IP68 Junction Box for Long Term Endurance



100% Hi-Pot Testing to Ensure Safety



MBB Half-Cell Technology provides Better Performance under Partial Shading

Solar Modules 545 Wp (DCR)

Half Cut MONO PERC 10BB
Bifacial (Transparent Back Sheet)

THE INDUSTRY'S BENCHMARK

Microtek Solar is an internationally renowned leading solar energy cost effective befitting solutions provider.

Our PV modules are the best in class in terms of power output and long-term reliability.

PRODUCT CERTIFICATES

 IEC CB Scheme	 Design Qualification	 Safety Qualification	 BIS Qualification	 European Conformity
 Certified Mfg. Process	 Environmental Mgt. System	 Health & Safety Mgt. System	 Bankable Product	 Reinsured by AriaRe

MADE IN INDIA



Industry leading linear power output warranty*



Product warranty on materials and workmanship**

* First year power degradation warranty shall be 2% and linear power warranty from year 2 to year 30. w.e.f. 1st October 2025.

**15 years product warranty for Dual Glass modules and 12 years product warranty for modules with transparent backsheet. w.e.f. 1st October 2025.

TECHNICAL DATA

ELECTRICAL PERFORMANCE [Note: Power tolerance: 0 ~ +4.99 W. Power measurement uncertainty: < ±3%. Average value of NOCT: 44.51 ± 2 °C]

ELECTRICAL CHARACTERISTICS*

	RSB545WC	
	STC	NOCT
Nominal Maximum Power (Pmax)	545 W	408 W
Optimum Operating Voltage (Vmp)	42.01 V	39.23 V
Optimum Operating Current (Imp)	12.98 A	10.41 A
Open Circuit Voltage (Voc)	49.91 V	46.80 V
Short Circuit Current (Isc)	13.59 A	10.95 A
Module Efficiency	21.13 %	


BIFACIAL OUTPUT – BACKSIDE POWER GAIN @ STC* [Bifaciality Factor: 75% ± 10%]

[Note: The bifacial gain depends on the power plant design and site conditions. Electrical component ratings should be selected as per actual Bifacial gain at site (module currents indicated below)]

5%	Nominal Maximum Power (Pmax)	573 W
	Module Short Circuit Current / Efficiency	14.27 A / 22.18 %
10%	Nominal Maximum Power (Pmax)	600 W
	Module Short Circuit Current / Efficiency	14.95 A / 23.24 %
25%	Nominal Maximum Power (Pmax)	682 W
	Module Short Circuit Current / Efficiency	16.99 A / 26.41 %

Mechanical Specifications

Dimensions (L x W x T in mm)	2278 x 1133 x 40
Net Weight(±1Kg)	28.6Kgs.
Cell type / No Of Cell	144 Half-cut Mono PERC Bifacial Solar cells
Frame	Anodized Aluminum Alloy (6005, Temper T6, Silver colour)
Front Cover	ARC coated Low Iron Tempered Glass (3.2 mm thick)
Encapsulate	Ethylene Vinyl Acetate (EVA) - PID resistant and UV resistant
Back Cover	Corona treated PVDF Fluoro-polymer based transparent Backsheet
Junction Box	Split type (3 nos. with individual Bypass Diode) – Weatherproof (IP68)
Bypass Diode	40 A, 45 V, 200 °C max. junction temperature
Cable	4 sq. mm, 400 mm length (1200 mm available on request)
Connectors	MC4 compatible (MC4 original available on request)
Application Class Rating	Class A
Safety Class Rating	Class II
Mechanical Load Test (as per IEC & UL)	5400 Pa-Front; 2400 Pa-Back
Mounting Holes Pitch (Y)-mm	[A] 1400, [B] 1100
Mounting Holes Pitch (X)-mm	1095

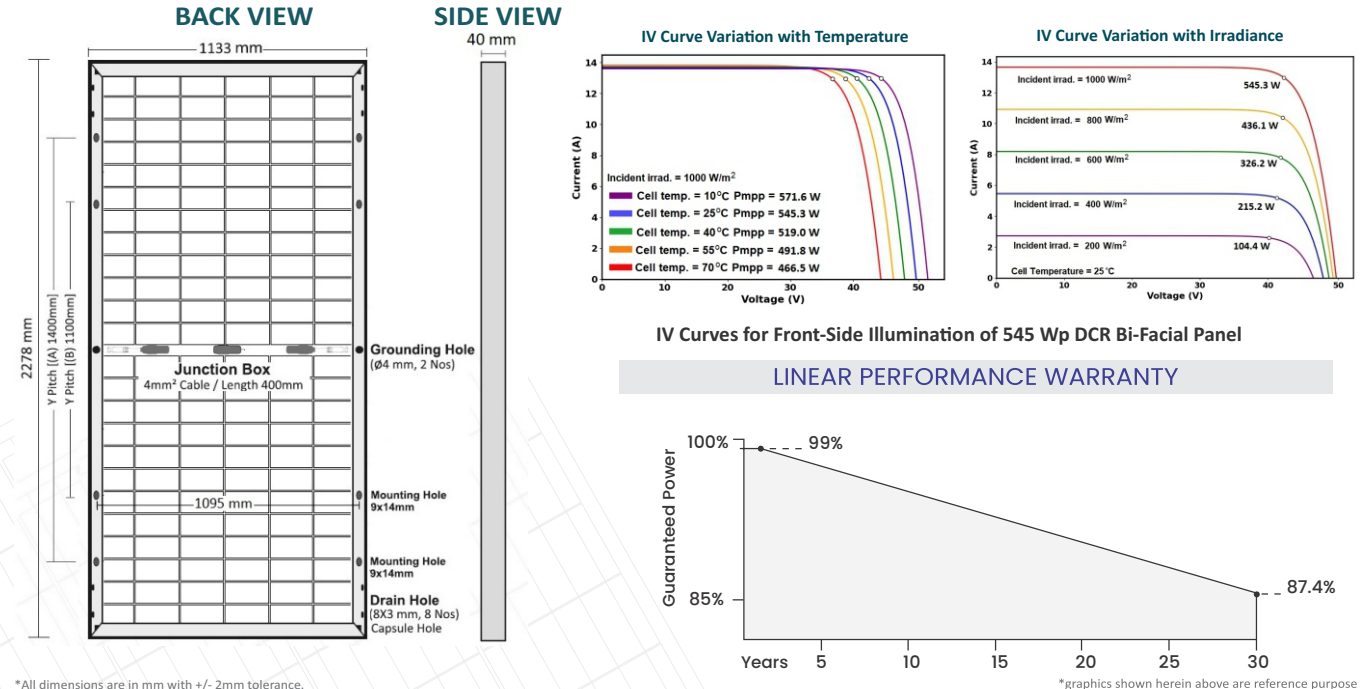

MAXIMUM OPERATING CONDITIONS

Operating Temperature:	-40°C to +85°C
Maximum System Voltage:	1500V
Maximum Series Fuse Rating:	25A

TEMPERATURE COEFFICIENTS

Current α(Isc) :	0.0284%/°C
Voltage β(Voc) :	-0.2444%/°C
Power γ(Pmax) :	-0.3210%/°C

STACKING STANDARD

	22FT	32FT	40FT
No. of Modules per Container:	270	432	540
No. of Pallets per Container:	10	16	20
No. of Modules per Pallet/Weight:	27 Nos/820 Kg		
Pallet Dimensions:	2320*1000*1275		

Caution: Please read safety and installation instructions before using the product. ***Warranty:** Linear performance warranty for 25 years, with degradation up to 2% in 1st year and 0.6 %/year from year 2 to year 25. Please read Microtek Warranty documents thoroughly. **Disclaimer:** Specifications included in the datasheet are subject to change without prior notice owing to continuous innovation in the Product Development and R&D Activities. Microtek International Pvt. Ltd., reserves the right to make any adjustment to the information described here. Dataset contained in this specification do not form a representative of a single module data. @T&C Apply.

MICROTEK INTERNATIONAL P. LTD.,

H-57, Udyog Nagar, Rohtak Road, New Delhi-110041.

www.microtek.in

GoRewatt Energy Hub Pvt Ltd

Sy.No, 78/3, Ramakrishnapura Rd, Iggalur,
Chandapura, Bengaluru, Karnataka 560081

Call Us: +91 767676 5959 E-Mail: sales@gorewatt.com

www.gorewatt.com